radwag.com

H315.4P2.2000.H2 Stainless Steel Beam Scale

WP-236-0007

More information on the website
mirror.radwag.com/en/info,w1,MIM



The drawings, photos and graphics used are for illustrative purposes only.

Functions

- Plus/Minus Control
- Percent Weighing
- Totalizing
- Parts counting
- Internal battery
- Peak hold
- Newton unit measurement
- Animal weighing

Datasheet

Metrological parameters	
Maximum capacity [Max]	2000 kg
Minimum load	20 kg
Readability [d]	1 kg
Verification unit [e]	1 kg
Tare range	-2000 kg
Max readability for non-verified scale	1000 g
OIML Class	III

Physical parameters	
Display	4.3” LCD (backlit)
Cable length	3 m + 5 m
Weighing pan dimensions	2 pcs 2.5 m
Device dimensions W x D x H	2500×120×105 mm
Packaging dimensions W x D x H	2700×400×550 mm
Scale mass with indicator	68 kg
Construction	
Protection class	IP 66 / 69 construction, IP 66 / 67 / 69 terminal
Communication interface	
Communication interface	RS232, USB
Optional interfaces	RS232 or RS485 or 4IN/4OUT or Ethernet or analog output 4-20 mA
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Optional power supply	internal rechargeable battery
Operation time on batteries	max 7h
Environmental conditions	
Operating temperature	-10 – +40 °C
Relative humidity	10% – 85% RH no condensation





Additional fee for verification

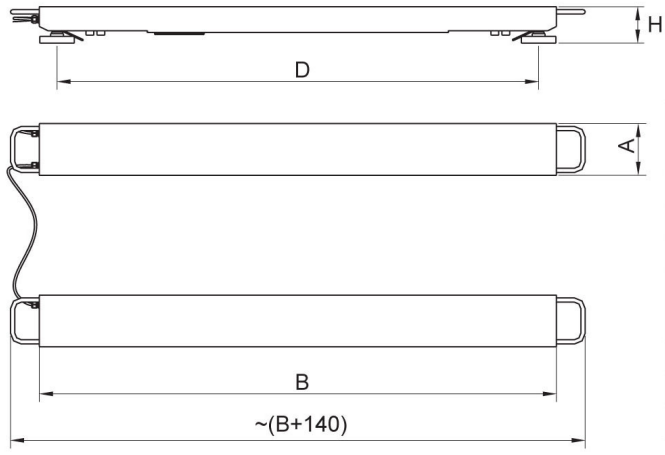

Accessories (Additional Fee)

AP2-4 Current Loop Unit
RS 232 cables (scale - printer)
Displays
Ethernet cables (scale - Ethernet)
RS 232, RS 485 cables
Power Adapters
RS 232 – Ethernet Converter
USB adatper
Receipt Printer
USB cable (scale - printer)
Stands, wall mounting kits and mounting brackets
RS 232 – USB Converter

Software (Additional Fee)

• RAD Key [WX-010-0005]
• Scale Editor 2.1 [WX-010-0173]
• R-Lab [WX-010-0080]

Device dimensions W x D x H



Scale type	A	B	H	D
H315.4P2.600.H	120	1200	85	1100
H315.4P2.1500.H	120	1200	85	1100
H315.4P2.3000.H	120	1200	85	1100
H315.4P2.2000.H1	120	2000	105	1900
H315.4P2.2000.H2	120	2500	105	2400
H315.4P2.4000.H1	120	2000	155	1880
H315.4P2.4000.H2	120	2500	155	2380
H315.4P2.6000.H1	120	2000	155	1880
H315.4P2.6000.H2	120	2500	155	2380

dimensions in mm