radwag.com

Basamento C315.4.3000.C8/9

WP-230-0015

More information on the website
mirror.radwag.com/it/info,w1,U3D



The drawings, photos and graphics used are for illustrative purposes only.

Funzioni

- Plus/Minus Control
- Percent Weighing
- Totalizing
- Parts counting
- Internal battery
- Peak hold
- Newton unit measurement
- GLP Procedures
- Animal weighing
- ALIBI Memory

Specifiche

Parametri metrologici	
Portata massima [Max]	3000 kg
Portata minima [Min]	20 kg
Divisione [d]	1 kg
Intervallo di verifica della bilancia [e]	1 kg
Campo di tara	-3000 kg
Massima leggibilità per bilance non verificate	200 g
Classe OIML	III

Parametri fisici	
Display	4,3” LCD (backlit)
Lunghezza del cavo	3 m
Dimensione piatto	1200×1500 mm
Altezza della piattaforma	120 ± 10 mm
Dimensioni del pacco L x P x A	1600×1300×500 mm
Mass scala con indicatore	135 kg
Costruzione	
Punteggio IP	IP 65 construction, IP 67 cell, IP 43 terminal
Interfaccia di comunicazione	
Interfaccia	RS232
Interfacce opzionali	RS232
Parametri elettrici	
Alimentatore	100 – 240 V AC 50/60 Hz and battery
Massimo assorbimento elettrico	5 W
Tempo operativo delle batterie	max 8h
Environmental conditions	
Ambiente di lavoro	-10 – +40 °C
Umidità relativa	10% – 85% RH no condensation




Additional fee for verification

Accessori (Additional Fee)


Alimentatore
Cavo seriale RS 232 (connessione bilance - Stampanti)
Supporto, set di montaggio a muro e braccetti di montaggio
Cavo di alimentazione con spina per accendisigari
Telaio per affondare il peso nel terreno
Display
Rampe
Cavo seriale RS 232, RS 485
Convertitore RS 232 – Ethernet
AP2-1 Modulo di conversione analogica
ConvertitoreRS 232 – USB
Convertitore RS 232 – RS 485
Stampanti di ricevuta

Software (Additional Fee)

• RAD Key [WX-010-0005]
• Editore per sistemi di pesatura 2.1 [WX-010-0173]
• R-LAB [WX-010-0080]

Device dimensions L x P x A



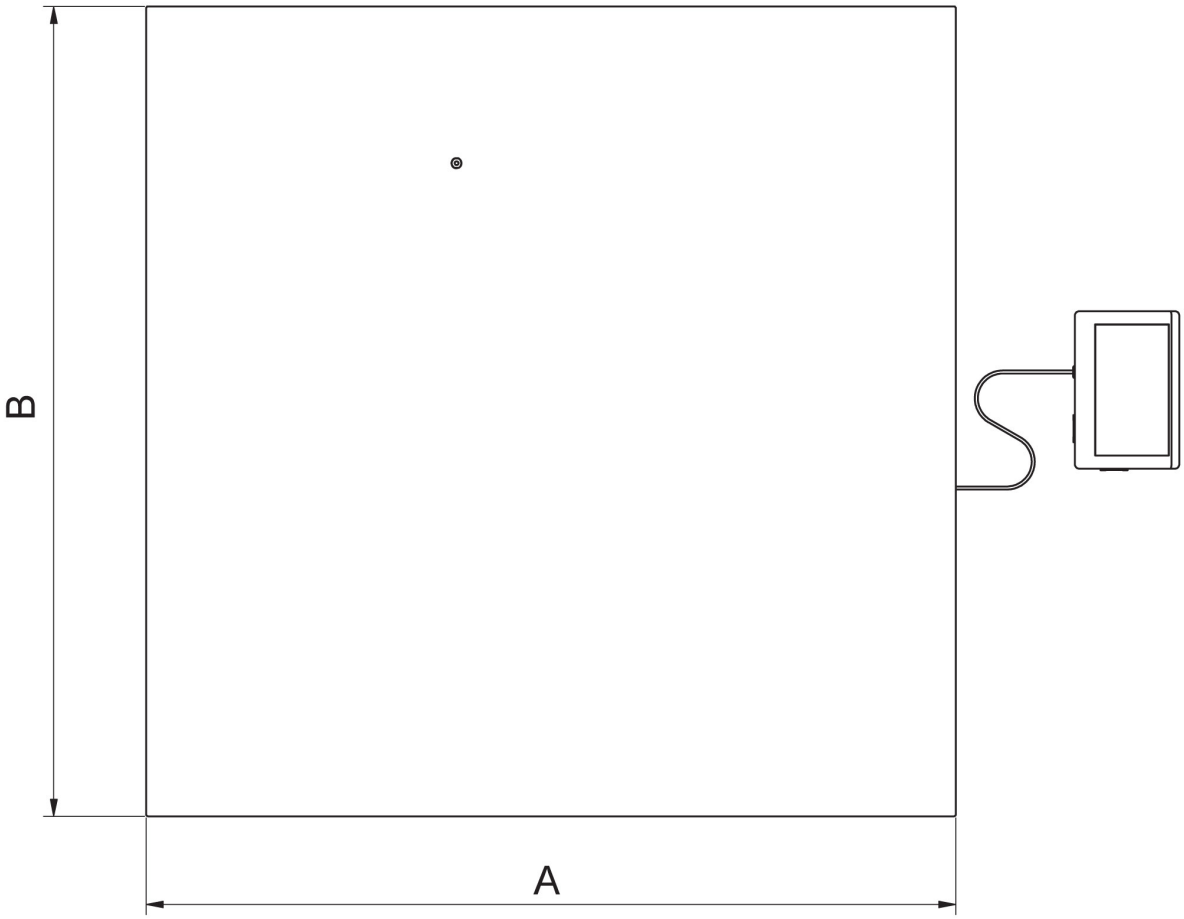

	A	B	H
C6	800	800	120 ±10
C7	1000	1000	120 ±10
C8	1200	1200	120 ±10
C8/9	1200	1500	120 ±10
C9	1500	1500	120 ±10
6000.C9	1500	1500	160 ±10